
1 insert gm card into **card slot** of Tech2



Connect self-test adapter with Tech2, then power on machine



3 Enter Main menu then choose F4: tool options

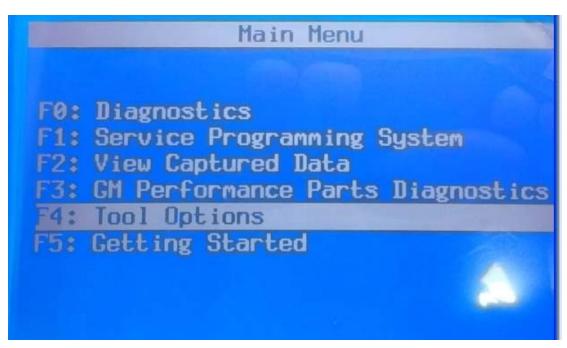


4 Choose F3: SELF-TEST



5 Press "Exist" to continue

3. CANdi must not be conr 2. ALDL loopback should to connected (GM3000109). 3. Failure to follow these instructions may invalid the self test. Press [EXIT] to continue

6 Choose Tech 2 self-test

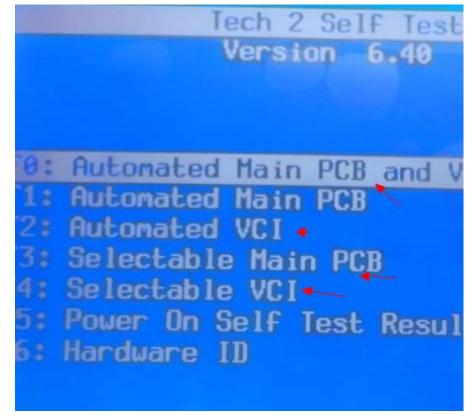

Tech 2 Self Test Version 6.40 F0: Automated Main PCB and VI F1: Automated Main PCB F2: Automated VCI F3: Selectable Main PCB F4: Selectable VCI F5: Power On Self Test Result F6: Hardware ID

8 VCI self-test result

Tuesday February	23 2011 04:57
Test Complete	
MUXPass SIPO 8Pass DLC 1Pass TPUPass CCDPass	ADCPass SIPO 20Pass DLC 2Pass HBCCIGNORED Dual Uart.Pass
J1708Pass Level Shifters	
Cross Point Short L and M Test I/O1-I/O16 LoopBack	.Pass -