
CN900 update instructions-It can update in internet

NO. 1: First keep CN900 in power and connect with computer by USB wire.




No 2: Open CN900 software and click

After then click Connect

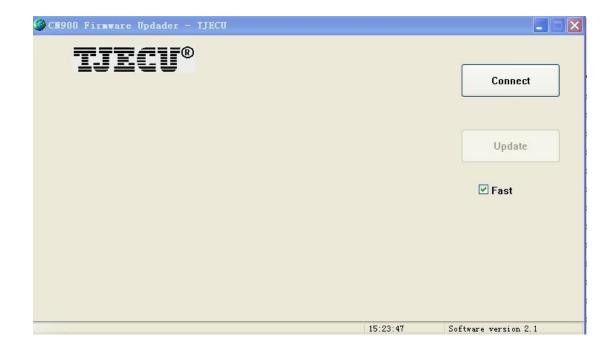

NO 3: Click Update

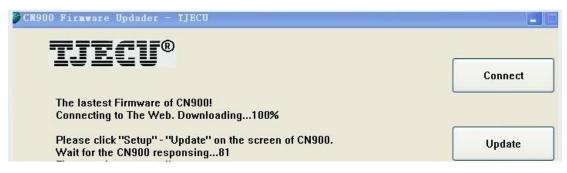


No.4: after you see computer screen appear those words inside the red line circle. Then Please click CN900 Setup menu and click update button .After click the Update button then CN900 will updating The lastest Firmware of CN900! Connecting to The Web. Downloading...100%


Please click "Setup" - "Update" on the screen of CN900. Wait for the CN900 responsing...99






No .5: During CN900 updating the computer and CN900's screen will showing following photos:

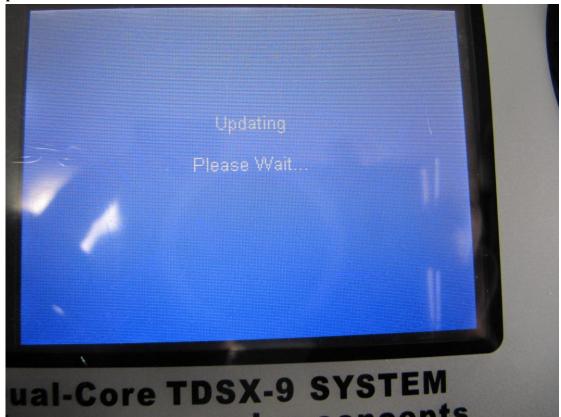

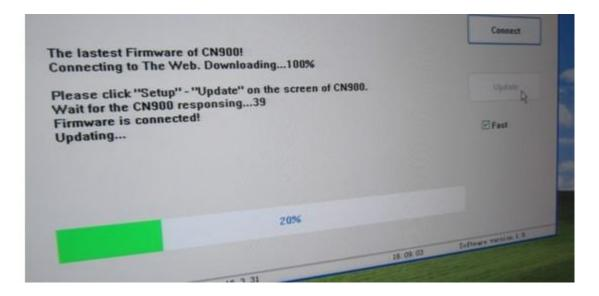

©CN900 Firmware Updader - TJECU		-
CN900 Firsware Updader - TJECU TITUE COUR The lastest Firmware of CN900! Connecting to The Web. Downloading100% Please click "Setup" - "Update" on the screen of CN900. Wait for the CN900 responsing81 Firmware is connected! Updating Update successfully! Reboot CN900		Connect Update VFast
CN900 reboots successfully! ardware is Connected ! Version: 1.17.3.31	12:43:32	Software version 2.1

NO.6: Press CN900 Setup button and press about button then can check CN900 version. Before Update the version as follow:

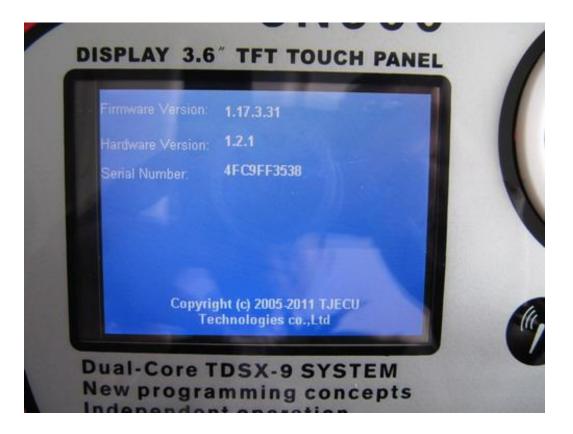

After Update the version as follow:

CN900 DISPLAY 3.6" TFT TOUCH PANEL
Firmware Version:1.19.3.31Hardware Version:1.2.1Serial Number:4FC9FF3538
Copyright (c) 2005-2011 TJECU Technologies co.,Ltd

No 7.. After update successful then under Special menu will become 3 submenu。 Showing as

follow:

Before update the Special menu :



After update the Special menu :

CN900 DISPLAY 3.6" TFT TOUCH PANEL	7
Unlock 48 Generate code	
Back	
Dual-Core TDSX-9 SYSTEM New programming concepts Independent operation	U

No.8: Do not put any chip in CN900 testing hole then Click Generate code will show you following information:



CN900 update successful !